


Multi-layer Power Inductor : MIPSCZ1005D series (Very Small Type)

Features

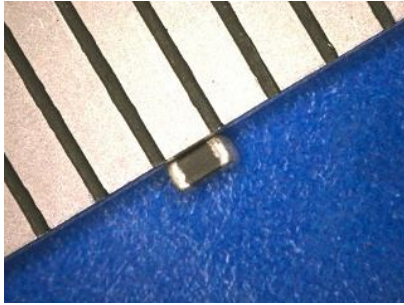

MIPSCZ1005D series
(1.0 x 0.5 x 0.75mm)

- 1.0x0.5 mm and 0.75mm in height (very compact size): CAE and fine printing technology made this compact size possible
- Stable minimum DC resistance in the class
- High speed mounting: Using SMT mounter makes less than a second mounting possible
- Excellent mounting strength by SMD chip making
- Reduced noise over 2/3 of coil inductor by optimal design of CAD
- Completely lead-free product and support lead-free solder

Applications



- DC-DC converters and power modules used for the following equipments. Compact electrical instruments such as cellular phones, Smart devices and WiFi / Bluetooth module.

Specifications


Product name	MIPSCZ1005D		
	R47T	R33T	R22T
Inductance(μH) at 1MHz	0.47±20%	0.33±20%	0.22±20%
DC resistance(ohms)	0.26±30%	0.25±30%	0.22±30%
Rated current(A)_typ.*1	0.65	0.7	0.85
Rated current(A)_typ.*2	0.9	1.2	1.5
Self-Resonance Frequency(MHz)_typ.	290	310	400

Rated current_*1 : In case temperature rise to 40°C due to self-heating.
Rated current_*2 : In case of L=-30% down from initial L value.


Operating temperature range: -40~85°C

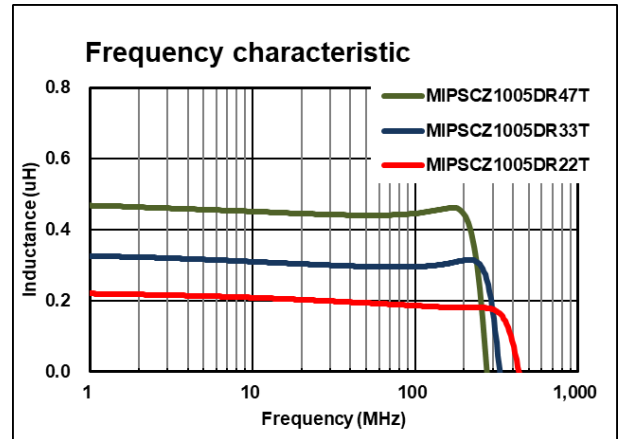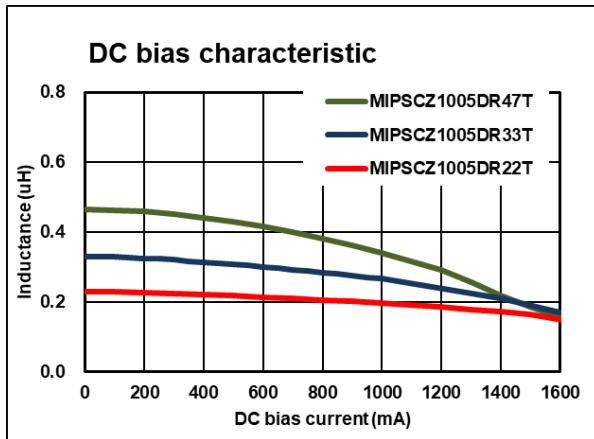

Shapes and Dimensions

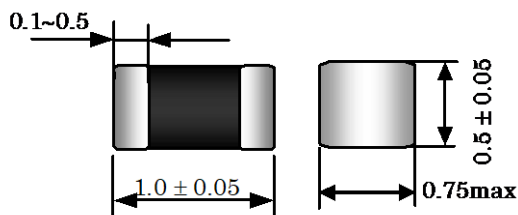

Recommended land pattern

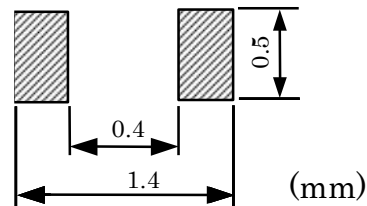

Standard package: Card board carrier tape (reel), Quantity: 8000pcs/1reel